

# TECH3000M

Armadura de Emergência IP65 - Permanente | IP65 Emergency Armature - Permanent  
 Armature d'urgence IP65 - permanente | Armadura de emergencia IP65 - Permanente



## CARACTERÍSTICAS | CHARACTERISTICS | CARACTÉRISTIQUES | CARACTERÍSTICAS

			230V~ 50Hz		0,5m	
Bal ELEC Ball		T5/G5	PC	IP65	IK08	PC
6500K	ABS	R51	W	3h	CE	
	RoHS					

## BATERIA | BATTERY | BATTERIE | BATERÍA

24V 4.5Ah	Ni-Cd		
--------------	-------	--	--

## DIMENSÕES | DIMENSIONS | DIMENSIONES | DIMENSIONES




## Função mantida | Maintained function | Fonction maintenue | Función mantenida



230V~

Emergência | Emergency | Urgence | Emergencia

COD	WATT (W)	lm	Qtd. Caixa.	CxLxA	GW	NW
1800230008 03.002.004.062.00004	2x8	400	12	43x39x37	15,80Kg	14,80Kg
180028001 03.010.036.000.00024	Pictograma saída para baixo					
180028002 03.010.036.000.00025	Pictograma saída para esquerda					
180028003 03.010.036.000.00026	Pictograma saída para direita					

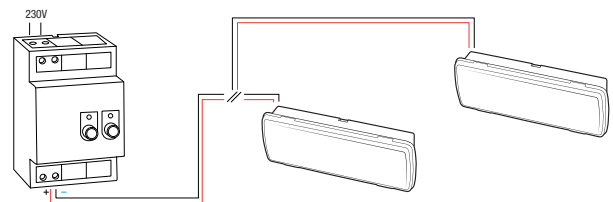

Linha de telecomando, cabo de 1,5mm<sup>2</sup>  
 Remote control line, 1,5mm<sup>2</sup> cable  
 Ligne de commande à distance, câble de 1,5 mm<sup>2</sup>  
 Línea de mando a distancia, cable de 1,5mm<sup>2</sup>

## OUTRAS INFORMAÇÕES | OTHER INFORMATION | AUTRES INFORMATIONS | INFORMACIÓN ADICIONAL



1801000001 | 03.010.036.062.00001

