



EFFICIENT-D

34W **2550Lm** | **2650Lm**



2025 **LED**

UGR<19



Especificações | Specifications | Spécifications | Especificaciones



100-240V
50/60Hz

GLASS

PMMA

CRI >80

3000K

4000K

100°

AL INJ

IP44

IK07

SHOP LIGHT

25.000h

LK

CE

RoHS

Standards

EN 60598-1

EN 60598-2-2

EN 62471

EN 62493

EN 55015

EN 61547

EN 61000-3-2

EN 61000-3-3


Opcional | Optional | Optionnel | Opcional

DALI

PUSH DIM

0-10V



Dimensões | Dimensions | Dimensiones | Dimensiones

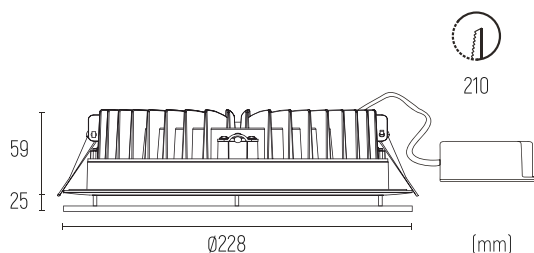


EFFICIENT-D

W 2830750021 LED 34W 3000K 100° 2550Lm
2830750022 LED 34W 4000K 100° 2650Lm

Outras Informações | Other Informations | Autres renseignements | Otras informaciones



Fotometria | Photometry | Fotometria | Photométrie



Efficient 34